




# Hydro-Gear®

*ZT Series*

## HYDROSTATIC TRANSAXLES

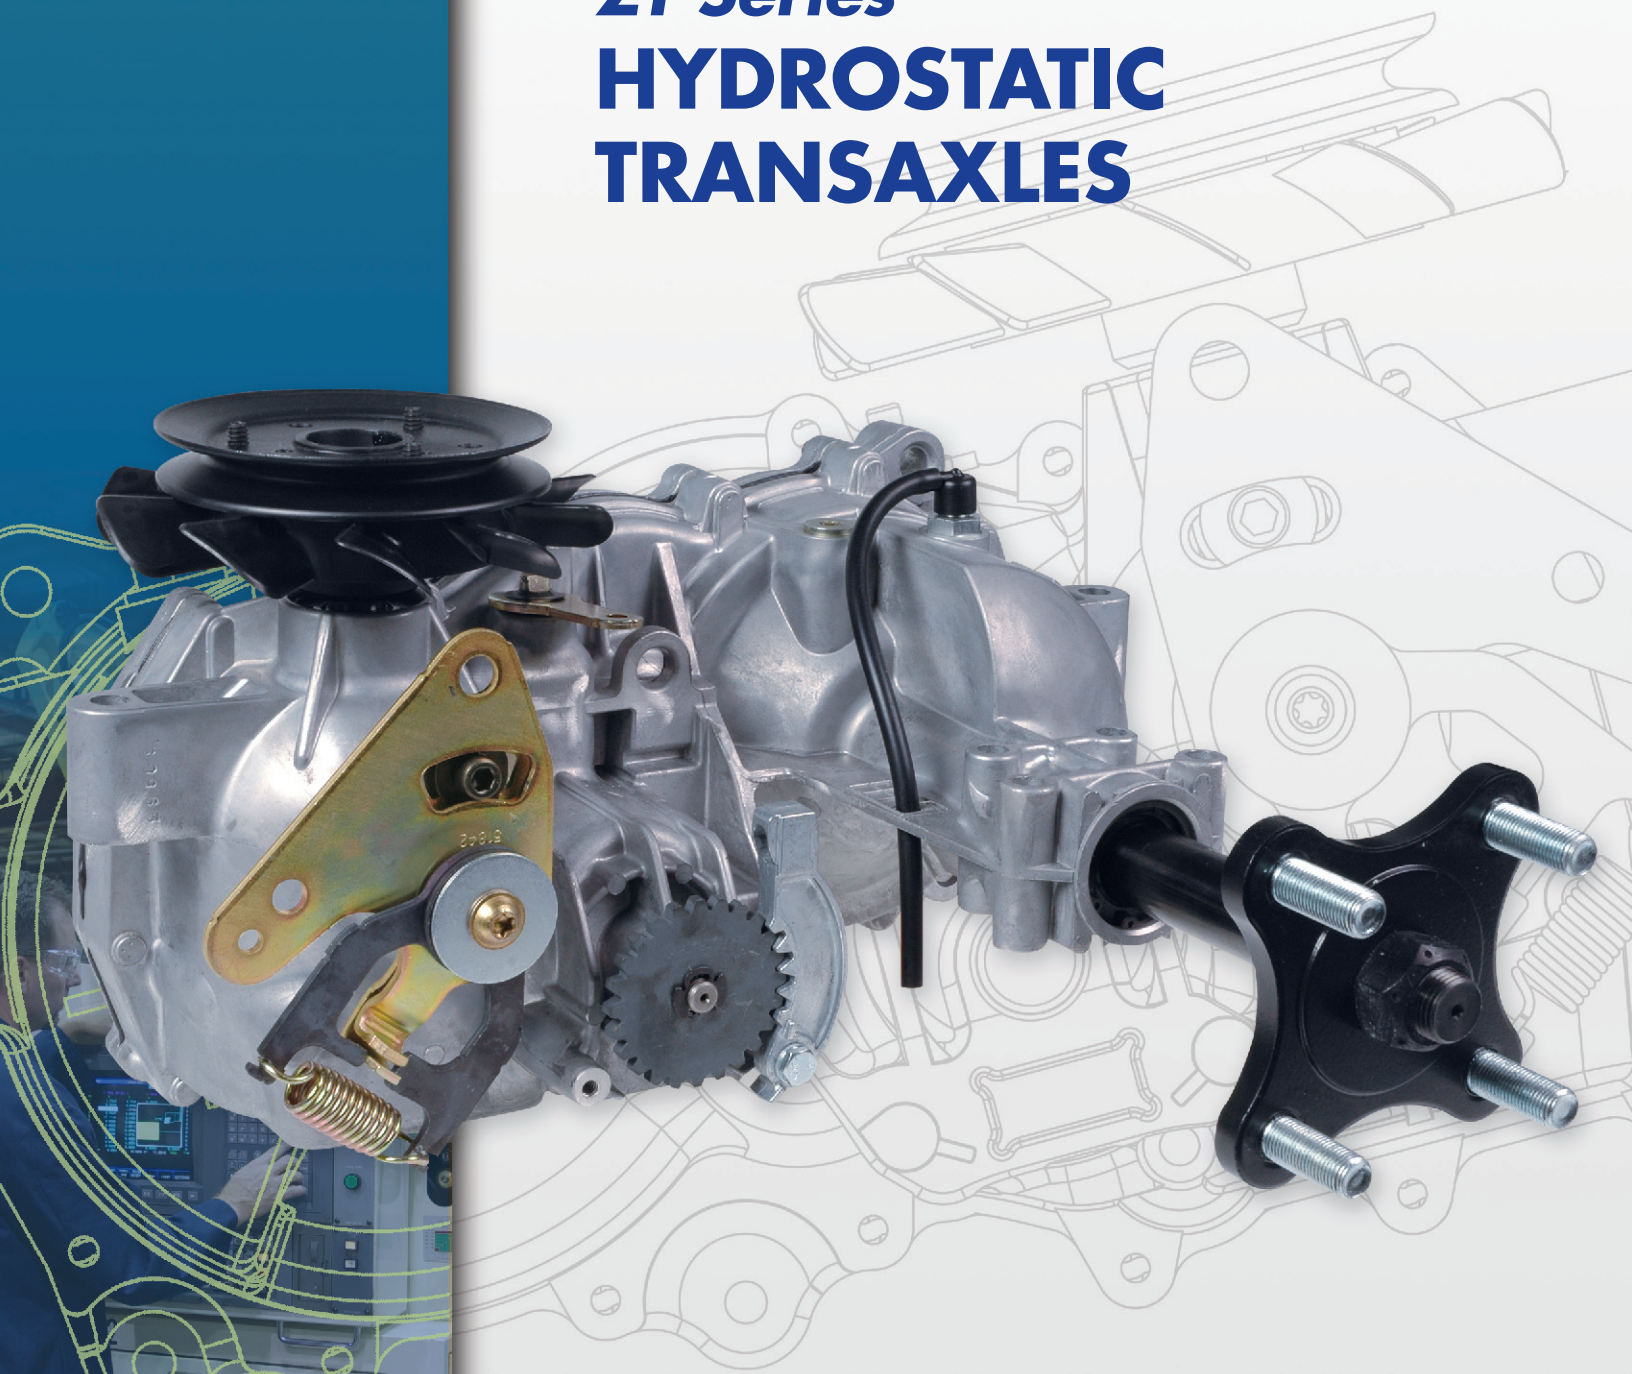

WE SET THE  
**WHEELS**  
IN MOTION.®

## Technical Specifications - Integrated Hydrostatic Transaxles

### Features & Benefits

- Factory pre-set neutral
- Bypass mechanism
- Speed and directional control
- Return-to-neutral option
- Charge pump and system relief valves (ZT-2800™)
- Several fan and pulley kit options
- External spin-on filter (ZT-2800™)

Transaxle Package Model	EZT® ZC	ZT-2800™		
		ZH/ZJ	ZK/ZL	ZM
<b>Overall Transaxle Reduction</b>	19.2:1	20.69:1	24.74:1	27.23:1
<b>Input Speeds</b>		3000 Non-Charged /3600 Charged		
Maximum Hi-Idle [No Load] rpm	3000			
Minimum rpm		1800		
<b>Output Torque</b>				
Intermittent lb-ft [N-m]	150 [203]	300 [406]	340 [461]	370 [502]
Continuous lb-ft [N-m]	115 [155]	160 [217]	180 [244]	200 [270]
<b>Weight on Tires (per unit)</b>				
Maximum with 18" tires lb [kg]	340 [154]	400 [181]	480 [217]	540 [244]
Maximum with 20" tires lb [kg]	—	360 [163]	440 [199]	480 [217]
Maximum with 22" tires lb [kg]	—	—	400 [181]	440 [199]
<b>Axle Shaft Diameter</b> in [mm]	1.00 [25.4]	1.00 [25.4]		
<b>Axle Shaft End Options</b> Type:	— 4-Bolt Flange Two Flats	Tapered 4-Bolt Flange 5-Bolt Flange		
<b>Parking Brake Type</b>	Cog	Internal		
<b>Weight of Unit</b> lb [kg]	29 [13]	32 [14.5]		

Specifications subject to change without notice.



**A World Leader in Hydrostatic Transaxles • Transmissions • Pumps • LSHT Wheel Motors • Gear Drives**

1411 South Hamilton St. • Sullivan, IL 61951 • Phone: (217) 728-2581 • Fax: (217) 728-7665 • www.hydro-gear.com

#### European Support Center

SKF Logistics Services • Heersterveldweg 16, Industriezone Oost • B-3700 Tongeren - Belgium

Attn: Hydro-Gear ESC • TÉLÉPHONE +32 (0) 12 670 631 • TÉLÉCOPIE +32 (0) 12 670 630 • E-MAIL: hgeuro@hydro-gear.com