


ZT-2200 (EZT[®])

PROVEN PERFORMER

- ⚙️ Our most popular integrated unit
- ⚙️ Low-maintenance design with an internal mesh oil filter for longer life
- ⚙️ External cog brake for maximum holding power
- ⚙️ Durable 10cc pump & 10cc motor

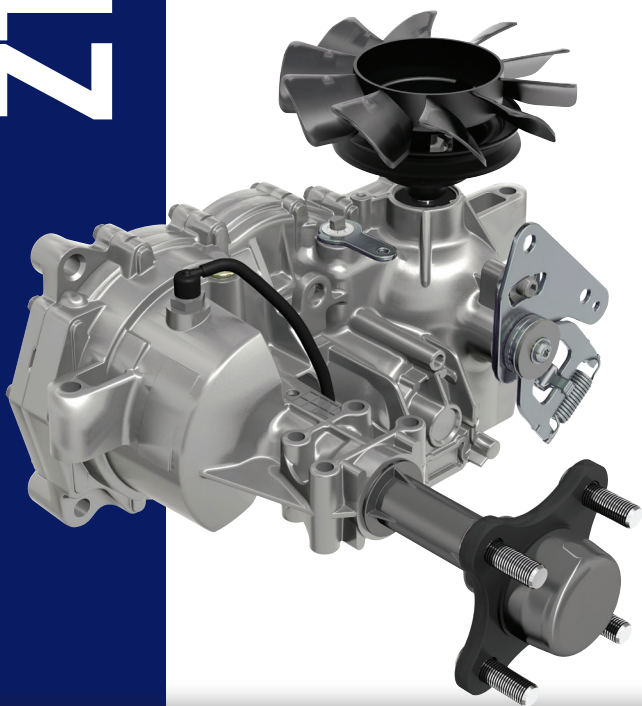

 **HYDRO-GEAR[®]**

DESIGNED & ASSEMBLED IN THE USA

SUPERIOR PERFORMANCE

SPECIFICATIONS

Pump Displacement	0.61 in ³ /rev [10 cc/rev]
Motor Displacement	0.61 in ³ /rev [10 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	3000 rpm
Min (Loaded)	1800 rpm
Output Torque	up to 215 lb-ft [up to 291 Nm]
Speed	up to 7 mph [up to 11 kph]
Gross Vehicle Weight	up to 900 lbs [up to 408 kg]
Axle Shaft Diameter	1.0 in [25.4 mm]
Axle Shaft Options	Two-Flats 4-bolt Flange
Weight of Unit	29 lbs [13 kg]

Specifications subject to change without notice



ZT2200-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

