


ZT-3200TM

RELIABLE & QUIET PERFORMANCE

- ⚙️ Standard performance package includes shock valves, cut steel gears, and charge pump
- ⚙️ Durable 1- $\frac{1}{8}$ inch axle for heavy loads
- ⚙️ High efficiency 10cc pump & 16cc motor
- ⚙️ Perfect fit for machines up to 1500 lbs

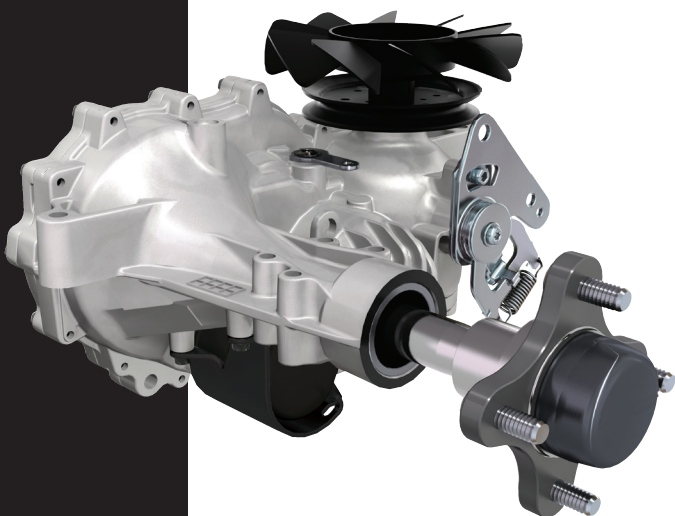

HYDRO-GEAR[®]
COMMERCIAL

DESIGNED & ASSEMBLED IN THE USA

ENGINEERED TO PERFORM

SPECIFICATIONS

Pump Displacement	0.61 in³/rev [10 cc/rev]
Motor Displacement	0.97 in³/rev [16 cc/rev]
Input Speeds	
Max Hi-idle (No Load)	3600 rpm
Min (Loaded)	1800 rpm
Output Torque	up to 470 lb-ft [up to 637 Nm]
Speed	up to 9 mph [up to 14 kph]
Gross Vehicle Weight	up to 1500 lbs [up to 680 kg]
Axle Shaft Diameter	1.125 in [28.56 mm]
Axle Shaft Options	Tapered 4 or 5 bolt Flange
Weight of Unit	33 lbs [15 kg]

Specifications subject to change without notice



ZT3200-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

