


MW14


HYDRAULIC MOTORS



T E C H N I C A L C A T A L O G

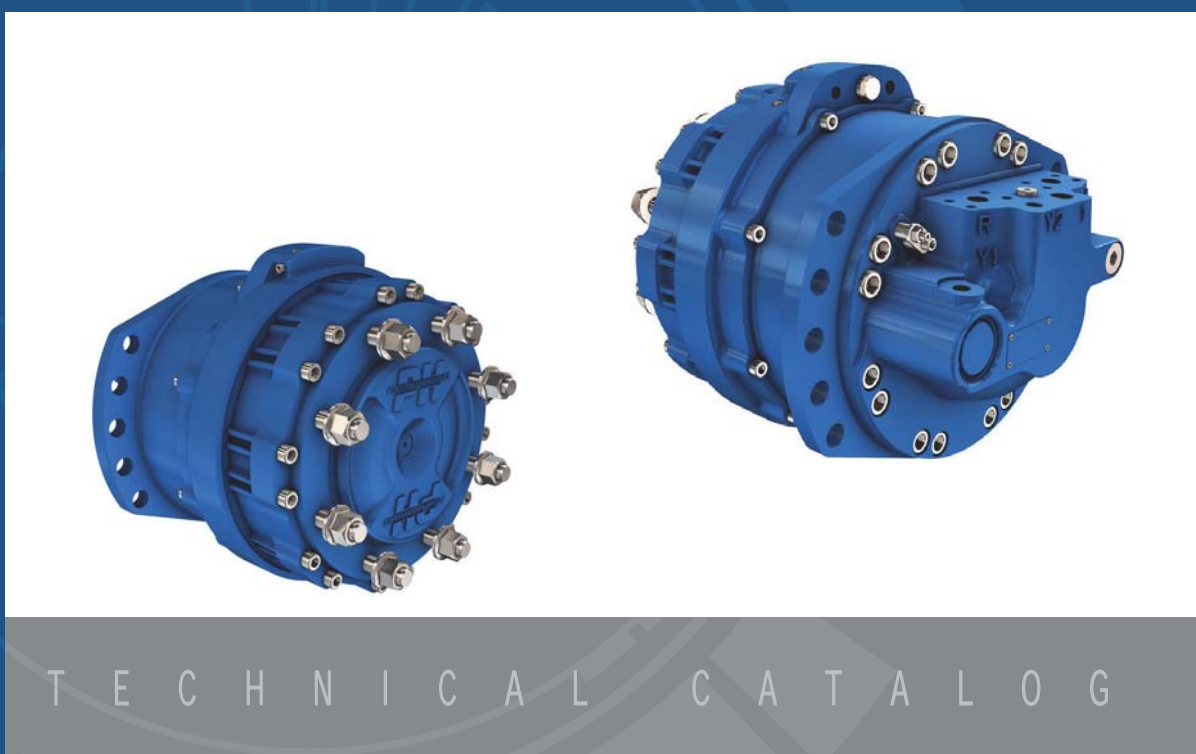

CHARACTERISTICS

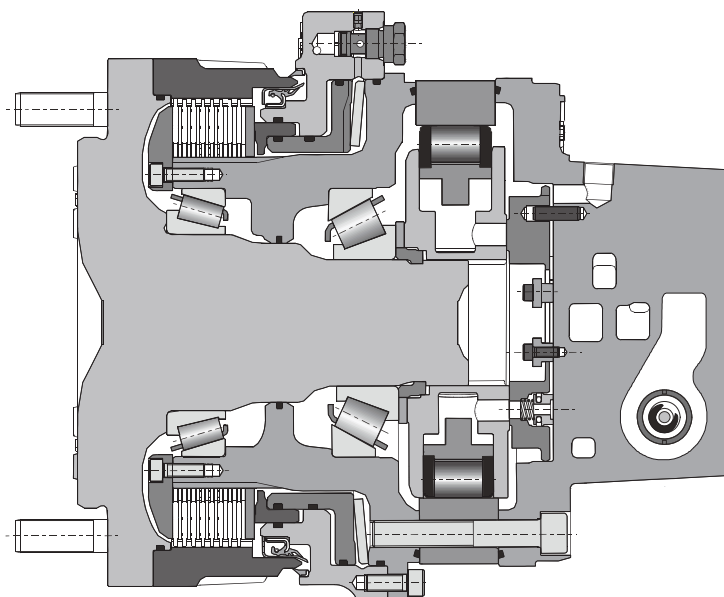

3-displacement motor

			①	②	③	
Cams	2	Displacement	cm³/tr [cu.in/rev.]	1 401 [85,4]	934 [57,0]	467 [28,5]
		Th. torque at 100 bar	Nm	2 230	1 486	743
		Th. torque at 1000 PSI	[lb.ft]	[1 133]	[755]	[378]
		Max.speed	tr/min [RPM]	120	145	175
		Max.power	kW [HP]	50 [67]	40 [54]	33 [44]
	Max. pressure	bar [PSI]		450 [6 530]		





For other cams: Please contact your Poclain Hydraulics application engineer.



Contact your Poclain Hydraulics application engineer to find out how the displacement shift from the third to the second displacement is controlled and to find out transmission capabilities in terms of displacement shift when the vehicle is in motion.





CONTENT

	Model code	4	Model code
	Wheel motor	7	Motor
	Dimensions for standard motor	7	
	Load curves	8	
	Efficiency	8	
	Wheel rim mountings	9	
	Studs	9	
	Hydraulic connections	10	
	Brakes	11	Brake
	Options	13	Options



MODEL

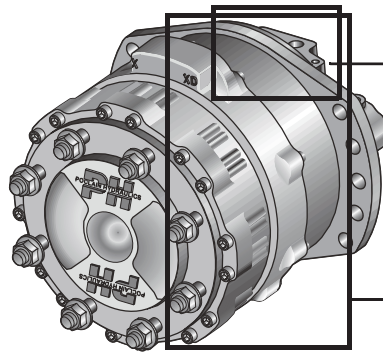

Pistons		
Standard	Standard rings	3
	High efficiency rings	4
Diamond™	Standard rings	C
	High efficiency rings	D

Displacement cm³/tr[cu.in/rev.]	
1401/934/467 [85.5/57/28.5]	2

3-displacement valving 3


Preferential direction of rotation	
Clockwise	D
Counterclockwise	G

Without mounting	1
Lug fixing	2

Hydraulic connections	
ISO 6162	1
ISO 9974-1	
ISO 6162	7
ISO 11926-1	



CODE

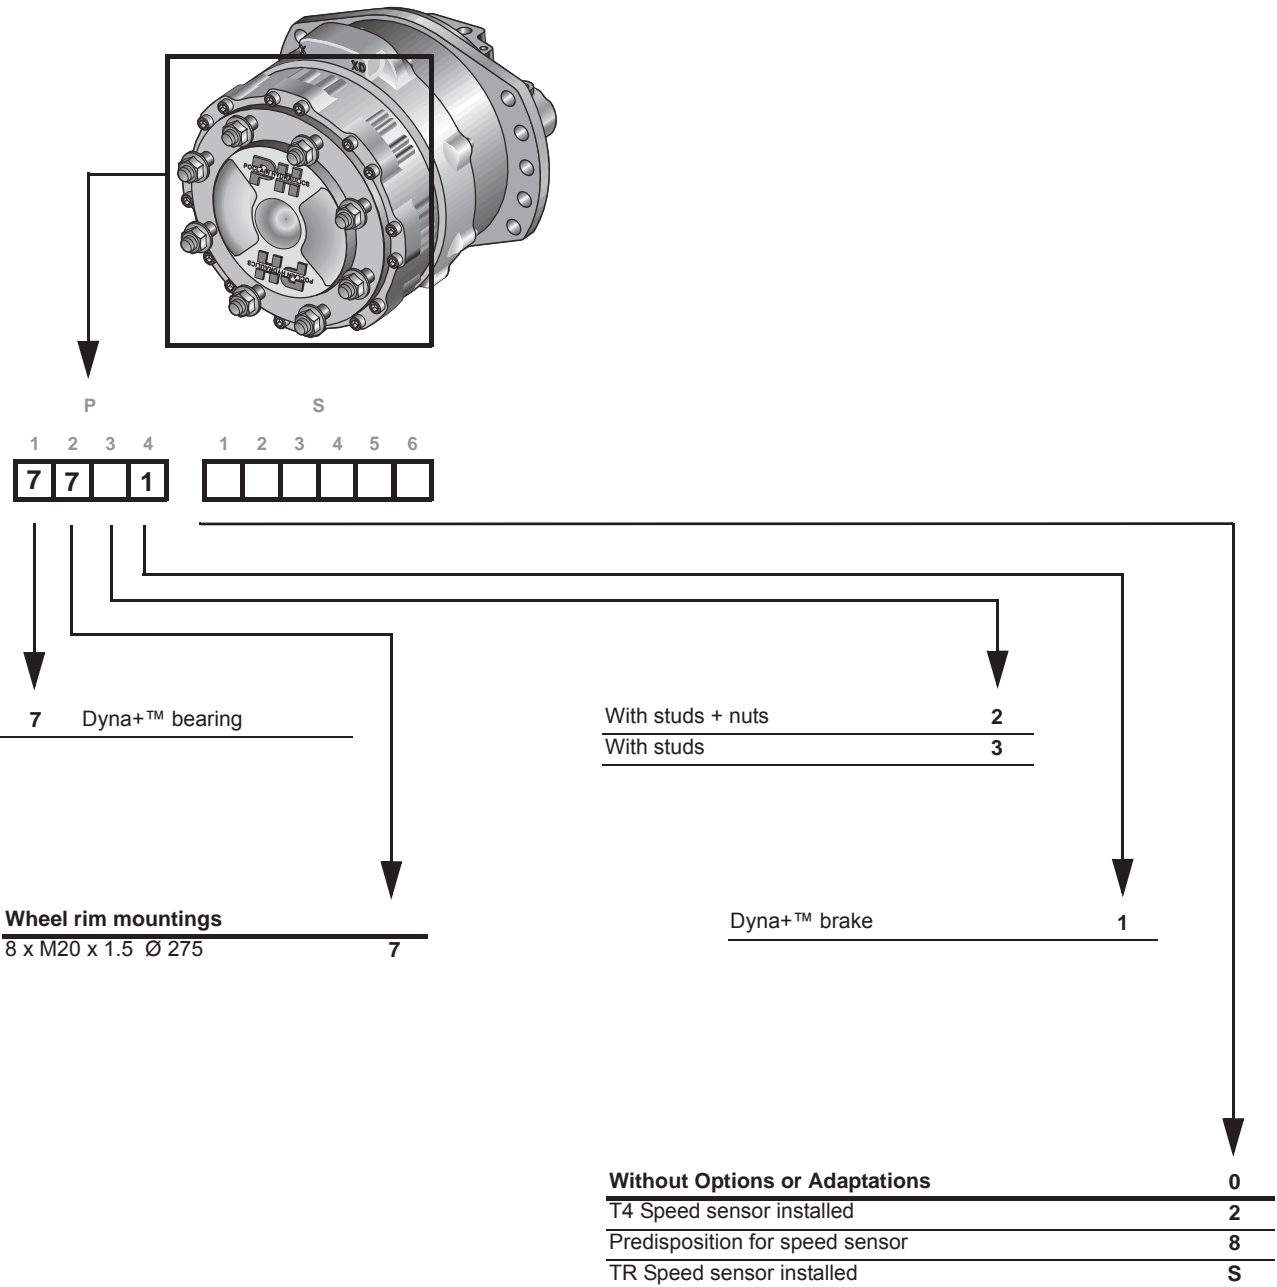

Model code

Motor

Brake

Options

**Methodology :**

This document is intended for manufacturers of machines that incorporate Poclain Hydraulics products. It describes the technical characteristics of Poclain Hydraulics products and specifies installation conditions that will ensure optimum operation.

This document includes important comments concerning safety. They are indicated in the following way:



Safety comment.

This document also includes essential operating instructions for the product and general information. These are indicated in the following way:



Essential instructions.



General information .



Information on the model number. Information on the model code.



Weight of component without oil.



Volume of oil.



Units.



Tightening torque.



Screws.



Information intended for Poclain-Hydraulics personnel.

The views in this document are created using metric standards.

The dimensional data is given in mm and in inches (inches are between brackets and italic>

**Associated documents**

Document type

N°

Generic installation

801478197L

Poclain Hydraulics Patents

Document type

N°

MW motor

FR2796992

MW motor

US6347572

Dyna + TM brake

FR2796886

Dyna + TM brake

US6357558




Dyna + TM brake

FR2797008



WHEEL MOTOR

Dimensions for standard motor

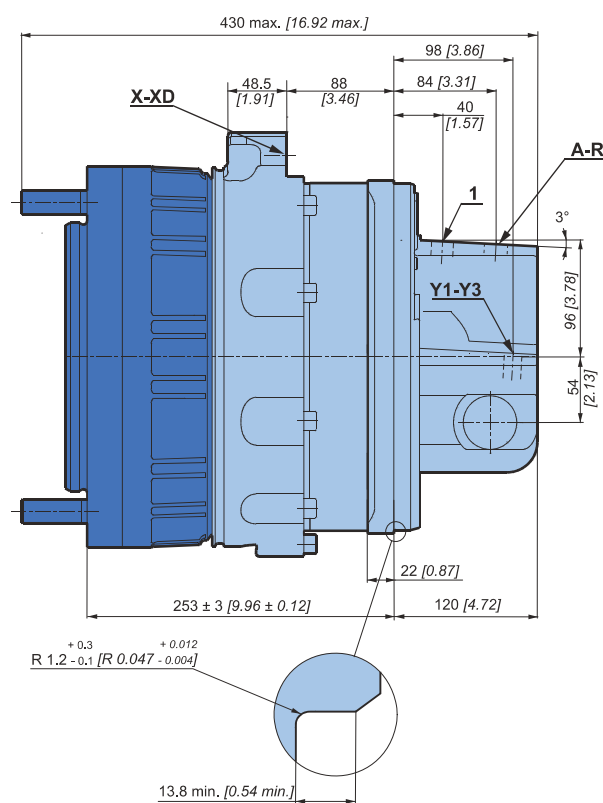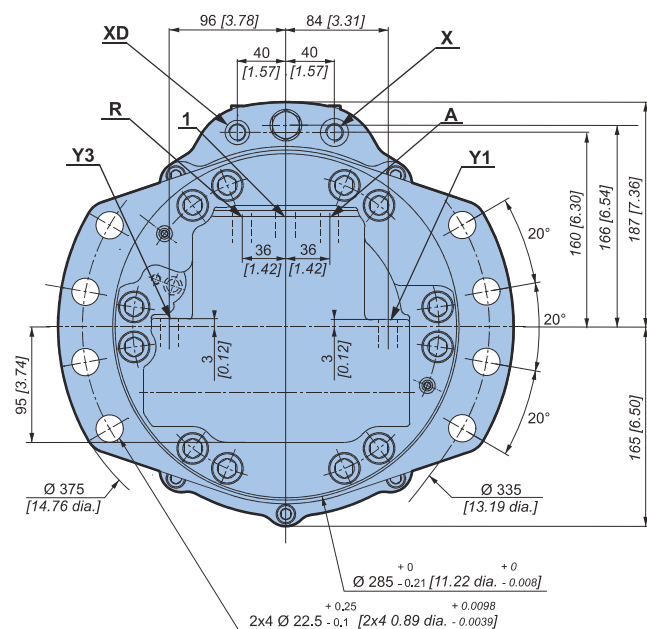

Model code

Motor

Brake

Options




Load curves

Permissible radial loads

Test conditions :

Static : 0 tr/min [0 RPM] 0 bar [0 PSI]



Dynamic : 0 tr/min [0 RPM], code 2 displacement, without axial load at max. torque




Service life of bearings

Test conditions :

L : Millions B10 revolutions at 150 bars (average pressure), with 25 cSt fluid, code 2 displacement, without axial load.

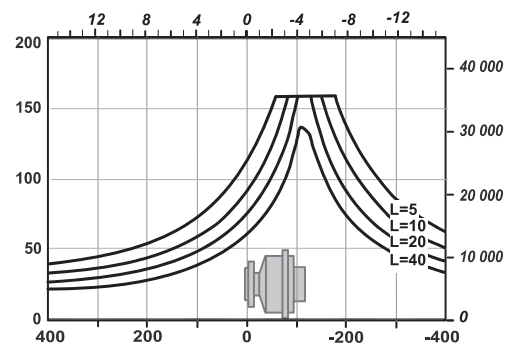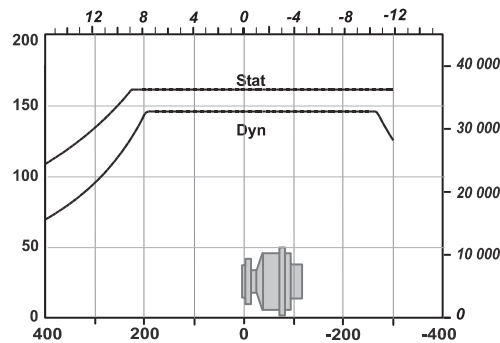



The service life of the components is influenced by the pressure. You must check that the combination of forces applied (Axial load / Radial load) is compatible with the permissible loads for the components, and that the resulting service lives of these components complies with the application's specifications. For an accurate calculation, consult your Poclain Hydraulics application engineer.





Efficiency

Overall efficiency

Average values given for guidance for code 2 displacement after 100 hours of operation with HV46 hydraulic fluid at 50°C [122°F].



Actual output torque

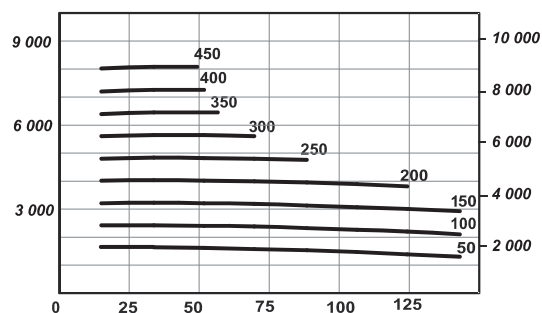
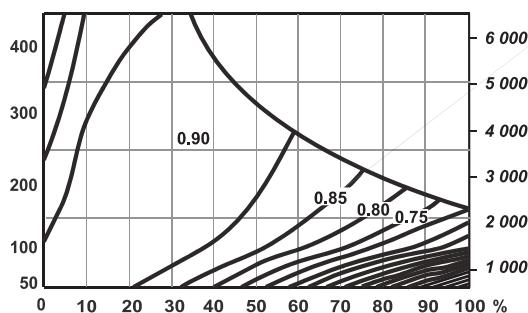


For a precise calculation, consult your Poclain Hydraulics application engineer.



Wheel rim mountings


	A (1)	B	C		L
7 7 3 1 1 2 3 4 P	Ø 220,7 [8,69 dia.]	Ø 275 [10,83 dia.]	Ø 314,5 [12,38 dia.]	8 x M20x1.5	54 [2,13]

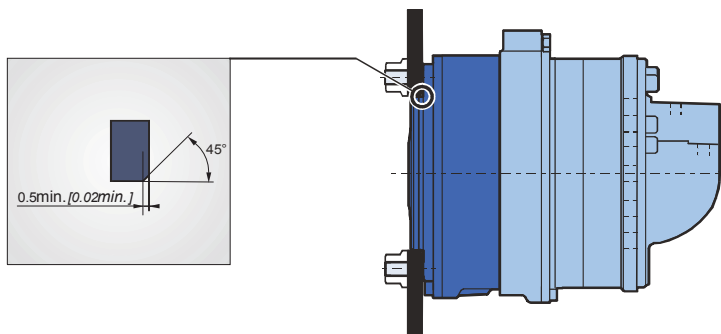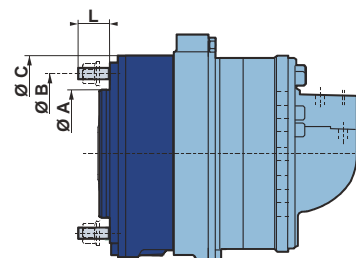(1) ± 0.1 [+0.004]


Studs

		C min.	C max.	D		Class	(1)	(2)
Studs	M20x1.5	3,5 [0,14]	27 [1,06]	25 [0,98]		12,9	600 [442,5]	770 [567,9]

(*) The tightening torques are given for the indicated loads.

(1) **Wheel rim** : Suggested tightening torque for wheel rim mountings (Re steel disc > 240 N/mm² [>34 800 PSI]).(2) **Standard** : Suggested tightening torque in other cases (Re steel flange > 360 N/mm² [>52 215 PSI]).

Chassis mountings

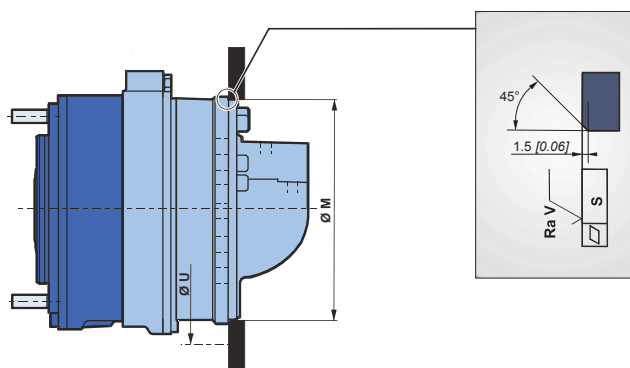

Ø M (1)	Ø U	S	Ra V		Class	(*)
330 [12,99]	335 [13,19]	0,2 [0,008]	12,5µm [0,49µin]	2x4 M20	8,8	410 N.m [302,4 lb.ft]

+ 0
- 0.21 [- 0.008]

The tightening torques are given for the indicated loads.



Take care over the immediate environment of the connections.



For other chassis mounting possibilities, please consult your Poclain Hydraulics engineer.

Model code

Motor



Brake

Options



Hydraulic connections


	Old standards	Standards	Power supply	Case drain	Return Power supply	1 st or 3 rd displacement control Y1-Y3	Control of parking break X	Control of service break XD
			A	1	R			
1	ISO 6162	ISO DP6162	DN 19 PN400		DN 19 PN400			
	DIN 3852	ISO 9974-1		M18 x 1.5		M16 x 1.5	M16 x 1.5	M14 x 1.5
7	ISO 6162	ISO DP6162	DN 19 PN400		DN 19 PN400			
	SAEJ514	ISO 11926-1		3/4" 16 UNF		3/4" 16 UNF	3/4" 16 UNF	9/16" 18 UNF





BRAKES

DYNA+™ Brake

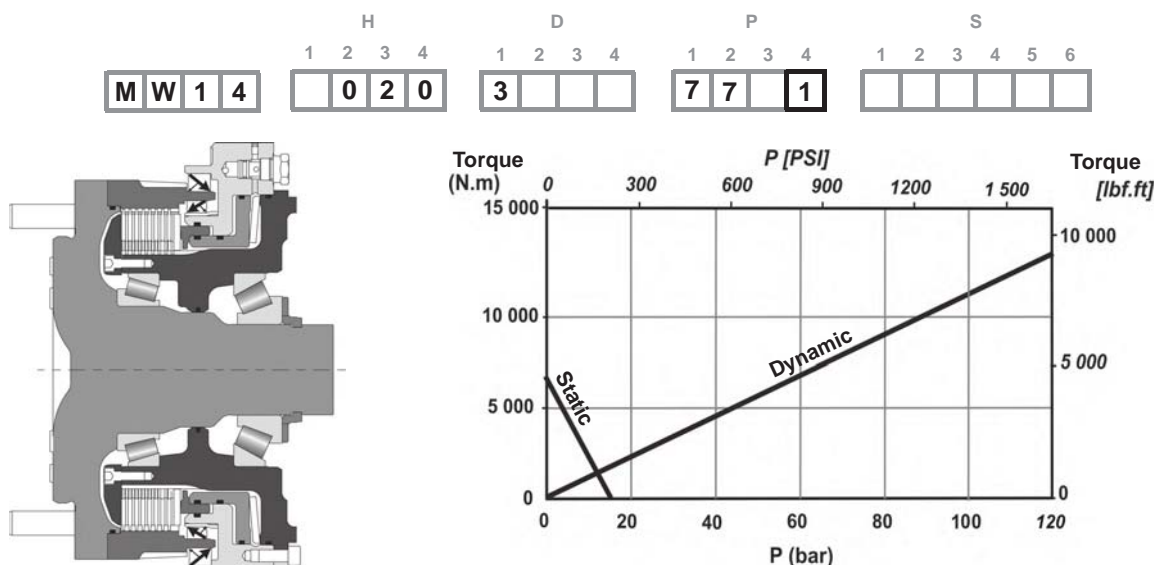

Brake operation

This multi-disk brake operates in two distinct ways:

- Either by an absence of pressure (static braking): The spring applies a force to the static piston that is transmitted to the dynamic piston, which clamps the fixed and free disks, preventing the shaft from turning. Braking torque decreases linearly as a function of unlocking pressure.
- Or by braking pressure (dynamic braking). The braking command creates a pressure on the dynamic braking piston, which clamps the fixed and free disks, preventing the shaft from turning. Braking torque increases linearly as a function of the unlocking pressure.

C 7 7 3 1

Hydraulically controlled dynamic braking

Max. permissible brake torque	13 100 Nm [9 660 lb.ft]
Pressure to obtain max. permissible brake torque	120 bar [1 740 PSI]
Volume required for braking	15 cm ³ [0,92 cu.in]
Mini. irrigation flow rate for dynamic braking	4 L/min [1,06 GPM]

Hydraulically controlled parking brake

Parking brake torque (new brakes)	6 810 Nm [5 020 lb.ft]
Parking brake torque (after 500 dynamic braking)	5 450 Nm [4 020 lb.ft]
Parking brake torque mini. requiring renovation	4 850 Nm [3 580 lb.ft]
Max. release brake pressure	30 bar [435 PSI]
Volume for brake release	67 cm ³ [4,09 cu.in]
Inlet conditions for brake release in towing (Flow rate of 2 L/min)	14 bar [203 PSI]
Emergency dynamical braking torque at 0 bar to the case (new brakes)	5 700 Nm [4 200 lb.ft]
Max. energy dissipation	583 kJ

Indicative values coming from fly-wheel test bench. Braking performance must be performed on machine by the manufacturer.



Brake release pressure vented.



Do not use both dynamic and parking brake simultaneously.



The use of certain oils, may not offer the characteristics stated above. Consult your Poclain Hydraulics sales engineer.





OPTIONS

H				D				P				S					
1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4	5	6
M	W	1	4	0	2	0	3	7	7	1							





You can accumulate more than one optional part. Consult your Poclain Hydraulics sales engineer.

2 - S - Q - 8 - Installed speed sensor or predisposition

Designation



T4 Speed sensor (without rotation direction)	2
TR Speed sensor (digital rotation direction)	S
TD speed sensor (two phase shifted frequencies)	Q
Predisposition for speed sensor	8

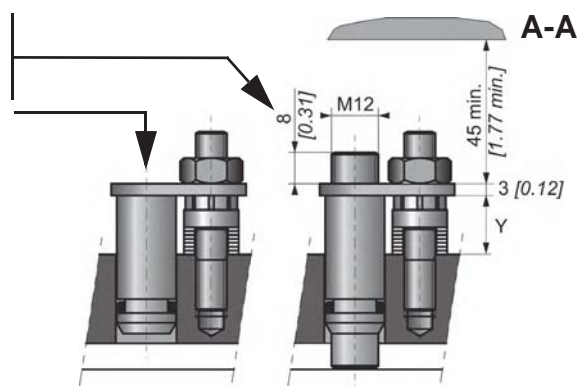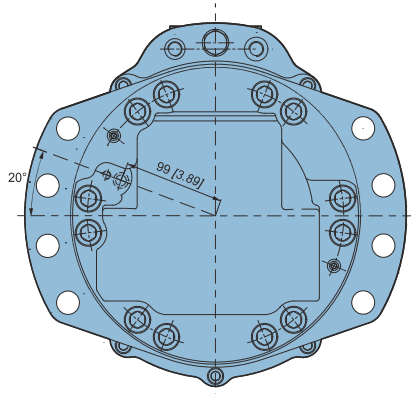

Max. length Y= 15.2

Standard number of pulses per revolution= 56



Look at the "Mobile Electronic" N° A01889D technical catalogue for the sensor specifications and its connection.



To install the sensor, see the "Installation guide" brochure No. 801478197L.

Model code

Motor

Brake

Options





Options		
Brake	Motor	Model code



Poclain Hydraulics reserves the right to make any modifications it deems necessary to the products described in this document without prior notification. The information contained in this document must be confirmed by Poclain Hydraulics before any order is submitted.

Illustrations are not binding.

The Poclain Hydraulics brand is the property of Poclain Hydraulics S.A.

 07/04/2017

 A05694P

 A05696R

 A05697S

 A05699U

 A05698T









www.poclain-hydraulics.com